

**JXi™ HEATER**  
POOL & SPA HEATER



**Jandy®**

# AN ULTRA-COMPACT AND ENERGY-EFFICIENT GAS POOL HEATER

**NEW! ASME Certified Models Now Available**



**JXi™**  
POOL & SPA HEATER

# THE TOTAL PACKAGE

The JXi™ heater sets the standard in pool and spa heating technology with its ultra-compact size, lightweight design, and energy-efficiency options that save on electrical costs. Providing extreme installation flexibility, this high-efficiency, low-NOx heater is a top choice for pool professionals and pool owners everywhere and is available in both natural and propane gas models.

## ENERGY EFFICIENT

84% thermal efficiency rating and **low-NOx** design surpasses strict DOE Energy Efficiency requirement.<sup>1</sup> Select JXi with VersaFlo™ or add the optional VersaFlo Accessory Kit to reduce energy costs even more.



### FASTEST INSTALLATION

Pro-driven features for the fastest, most customer-friendly installation include:

#### Best Retrofit Option

Plumbing flexibility for quick Mastertemp® and Max-E-Therm® replacement that requires no plumbing adjustments.

Heater Shown with Optional VersaFlo Integrated Bypass\*  
\*Not available with ASME models



#### Flexible Installation

Top can be easily removed for increased accessibility and rotated 180 degrees so you never need to rotate headers. Also includes a flip up electrical panel for convenient setup and service.

Major competitor model\*



#### Ultra-Compact Lightweight Design

Easy to store, transport, and install, JXi™ easily fits on a 2' x 2' pad and is 38% lighter with a 28% smaller footprint.

\*Compared to major competitor models

1. 84% Thermal Efficiency applies to 260K and 400K BTU Models with Copper Heat Exchangers, 200K BTU and all models with Cupronickel heat exchangers are 83%, see back page for complete model listing.

## Versa Plumb® - Ready

Installation in the Versa Plumb system\* reduces plumbing costs and increases energy efficiency, all using the smallest footprint available.

\*Sweep elbow included in all JXi models



## ASME Certified Models Now Available\*

JXi™ models are available with robust heat exchanger tubes and corrosion resistant bronze headers to meet the high stresses of commercial installations.

\*Not available with VersaFlo Integrated Bypass technology



## SAVE EVEN MORE WITH OPTIONAL VERSAFLO™ INTEGRATED BYPASS\*

\*VersaFlo not available on ASME certified models.

### Here's How:

- » The heater is typically only used 3.5% of average annual pump runtime, the other 96.5% of the time the heat exchanger can be bypassed.
- » JXi with VersaFlo activates the built-in flow bypass valve based on call for heat to avoid running water through the heat exchanger when water does not need to be heated.
- » When used with a variable-speed pump, JXi with VersaFlo requires considerably less electricity, thereby providing for significantly reduced electricity costs.\*\*
- » VersaFlo Integrated Bypass is available on select models or can be easily added to any JXi heater in the field.\*\*\*

\*\*Versus similar system without VersaFlo. \*\*\*See JXIVFKIT installation manual for more details.



## 5-YEAR HEAT EXCHANGER WARRANTY

JXi heaters with VersaFlo factory installed receive an industry leading 5-Year standard warranty on the heat exchanger.



**Bypass Mode**



**Heat Mode**

## ADDITIONAL FEATURES



Weld-free combustion chamber for optimal corrosion resistance, models available with copper or cupronickel heat exchangers.



Venturi-driven air and gas mix for enhanced performance.



Reliable, balanced flow and temperature control with thermal regulator valve.




Differentiated limit switches meet applicable product safety standards.




Corrosion-resistant temperature sensors for reliable operation.

INLET SIDE

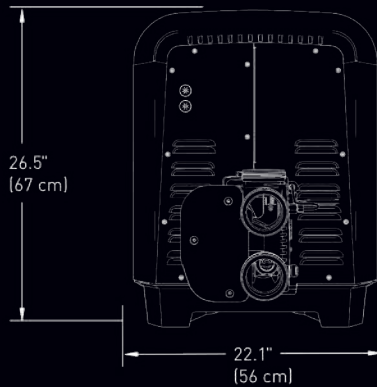

FRONT

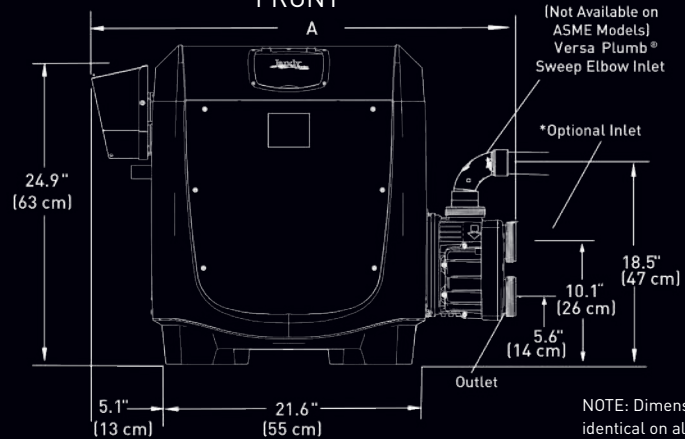

NOTE: Dimensions are identical on all heater models

## AVAILABLE IN THE FOLLOWING MODELS

Model #	Model # with VersFlo	Firing Rate	Gas Type	Heat Exchanger	Thermal Efficiency	Dim A	Weight	Vent Diameter*	Minimum GPM	Maximum GPM
JXi200N	JXi200NK	200K BTU	Natural Gas	Copper	83%	34.5	117 lbs.	6" (15 cm)	30	100
JXi260N	JXi260NK	260K BTU	Natural Gas	Copper	84%	34.5	120 lbs.	7" (18 cm)	30	100
JXi400N	JXi400NK	399K BTU	Natural Gas	Copper	84%	34.5	126 lbs.	8" (20 cm)	30	100
JXi400NN		399K BTU	Natural Gas	Cupronickel	83%	34.5	126 lbs.	8" (20 cm)	30	100
JXi200P	JXi200PK	200K BTU	Propane	Copper	83%	34.5	117 lbs.	6" (15 cm)	30	100
JXi260P	JXi260PK	260K BTU	Propane	Copper	84%	34.5	120 lbs.	7" (18 cm)	30	100
JXi400P	JXi400PK	399K BTU	Propane	Copper	84%	34.5	126 lbs.	8" (20 cm)	30	100
JXi400PN		399K BTU	Propane	Cupronickel	83%	34.5	126 lbs.	8" (20 cm)	30	100
JXiVFKIT	JXiVFKITK	JXi VersaFlo Accessory Kit (Not compatible with ASME certified heaters)								

## ASME Certified JXi Heaters (Not available with VersaFlo Integrated Bypass technology)

Model #	Firing Rate	Gas Type	Heat Exchanger	Thermal Efficiency	Dim A	Weight	Vent Diameter*	Minimum GPM	Maximum GPM
JXi260NC	260K BTU	Natural Gas	Copper	84%	31.6	163 lbs.	7" (18 cm)	30	100
JXi260PC	260K BTU	Propane	Copper	84%	31.6	163 lbs.	7" (18 cm)	30	100
JXi400NC	400K BTU	Natural Gas	Copper	84%	31.6	168 lbs.	8" (20 cm)	30	100
JXi400PC	400K BTU	Propane	Copper	84%	31.6	168 lbs.	8" (20 cm)	30	100

\* Minimum vent pipe size for Category I installations.  
2 units per pallet. Trade Series Exclusive product; not available for Internet sale.

Jandy.com | 1.800.822.7933

